


# Part No. ML6511-240, ML6512-240, ML6513-240, ML6514-240 Redbank 100mm LED Signal Light, 100-270VAC Data Sheet



<b>Fitted with</b>	45 LEDs/aspect
<b>Lens diameter</b>	100mm
<b>Input voltage</b>	100-270VAC
<b>Power consumption</b>	4 watt/aspect
<b>Current/aspect</b>	15mA @ 240VAC
<b>Light output</b>	>2000mcd/m <sup>2</sup>
<b>Dominant wavelength</b>	
<b>Red</b>	635nm
<b>Yellow</b>	590nm
<b>Green</b>	505nm
<b>Blue</b>	465nm
<b>White</b>	6500K
<b>Average life of LEDs</b>	60,000 hours
<b>Housing</b>	polycarbonate, UV stabilised
<b>Mounting</b>	L-bracket supplied
<b>Colours available</b>	red, green, amber, blue, white
<b>Options</b>	arrows & wording available
<b>System of protection</b>	IP55

## DIMENSIONS (Millimetres)

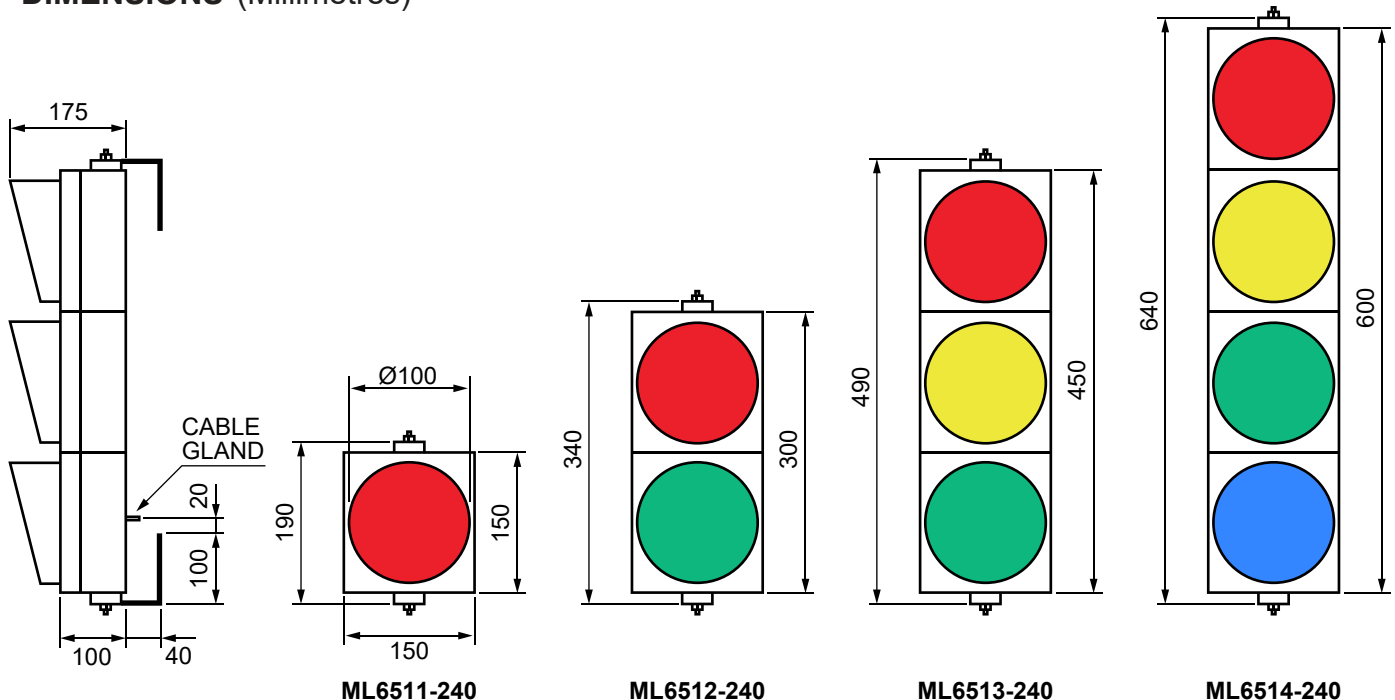

*Colours shown for illustration purposes only. Any combination available.*

Data may vary due to component tolerances.  
E & OE