
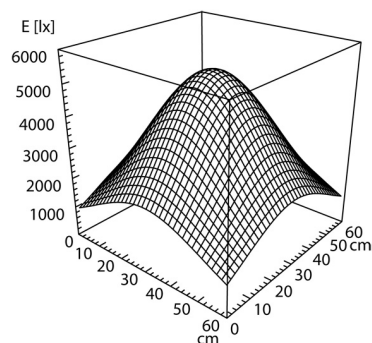
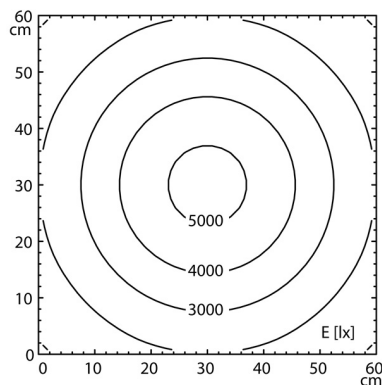
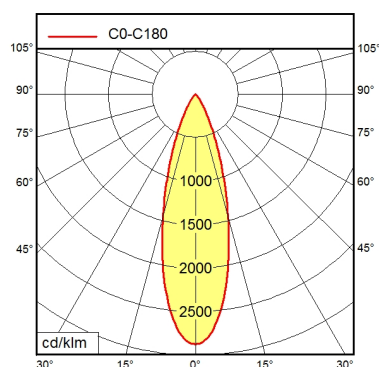




Light source
Work equipment
Connected load
Power consumption
Luminous flux
Luminous efficiency¹⁾
Light type/color
Colour temperatur
Color rendering index
Light distribution
Glare control
System of protection/Class
Technology
Operation
Housing
Light source cover
Arm
Mains lead
Fastening
Maximum ambient temperature
EAN
Weight without/incl. packaging
Packaging dimensions
Special features

LED
Without
22 - 26 V; DC
ca. 5 W
approx. 460 lm
approx. 92 lm/W
Cold white
approx. 5.000 K
CRI ≥ 70
Wide beam; Direct
Optics
IP 67; III
Switchable
Push button
Aluminium; Painted; Black
Borosilicate
Black
ca. 3 m; With free stranded wires
Screw-down flange
40 °C
4013330094874
ca. 1,6 kg; 2,5 kg
ca. 930 mm; 180 mm; 130 mm
Flood

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control gear.