


Flexible-tube luminaire SL SLF 500/750

113261000-00641183






CEE 7/XVI



BS 1363 A



NEMA 1-15P

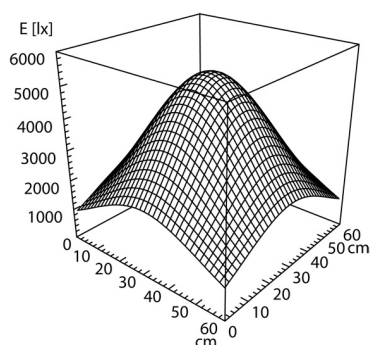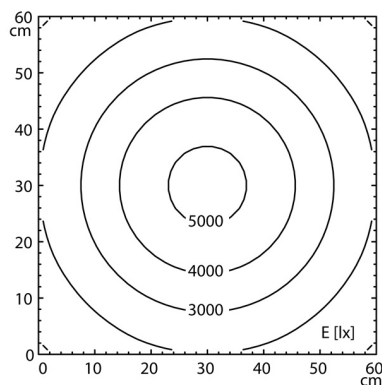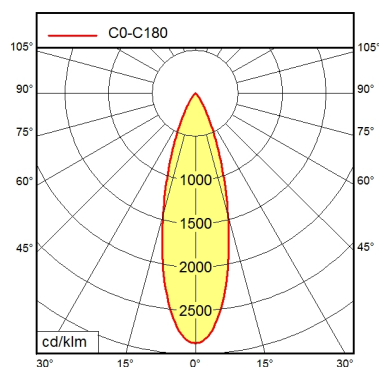

Light source

Work equipment

Connected load

Power consumption

Luminous flux

Luminous efficiency¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Glare control

System of protection/Class

Technology

Operation

Housing

Light source cover

Arm

Mains lead

Fastening

Maximum ambient temperature

EAN

Weight without/incl. packaging

Packaging dimensions

Special features

LED

Electronic plug-in transformer

100 - 240 V; AC; 50 Hz; 60 Hz

ca. 6 W

approx. 460 lm

approx. 76 lm/W

Cold white

approx. 5.000 K

CRI ≥ 70

Wide beam; Direct

Optics

IP 67; II with plug-in power supply, III without plug-in power supply

Switchable

Push button

Aluminium; Painted; Black

Borosilicate

Black

ca. 3 m; Mains plug; CEE 7/XVI; BS 1363 A; NEMA 1-15P

Screw-down flange

40 °C

4013330094898

ca. 1,7 kg; 2,6 kg

ca. 930 mm; 180 mm; 130 mm

Flood

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control gear