


Maggylamp 353E Series


Recessed Machine Light Spec Sheet

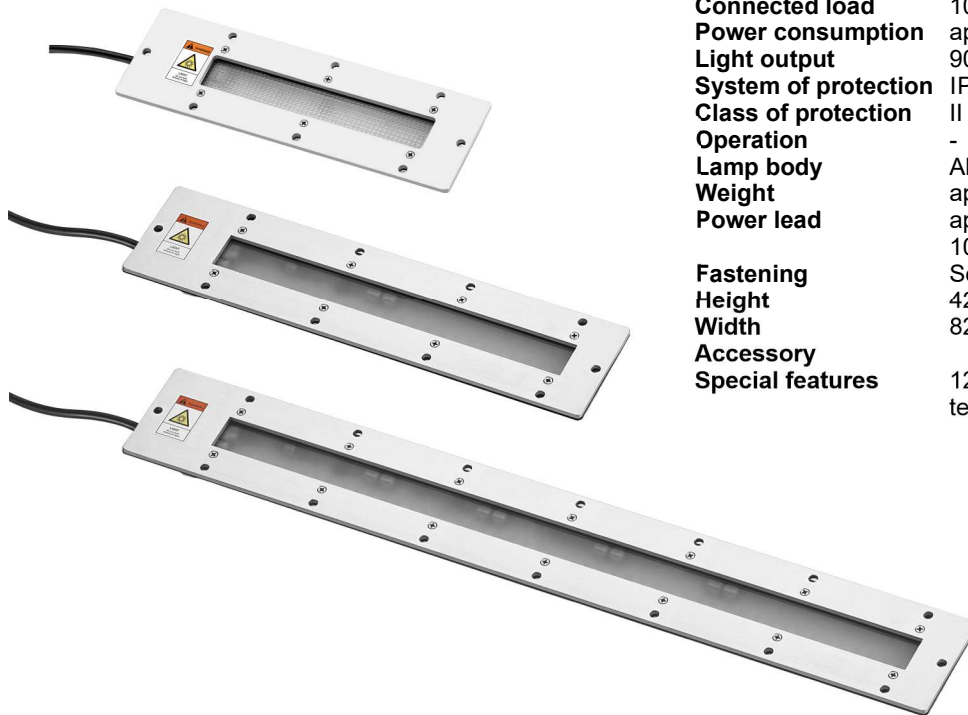


Fitted with	Light-emitting diodes
Work equipment	Integrated LED driver
Connected load	100~240VAC or 24V AC/DC
Power consumption	approx. 7 to 28 Watt
Light output	900 to 3500 lumen
System of protection	IP 67
Class of protection	II
Operation	-
Lamp body	Aluminium with High Impact Glass Screen
Weight	approx. 1 - 3.0kg
Power lead	approx. 1.8M Cable(with Mains Plug for 100-240VAC) without plug for 24V AC/DC
Fastening	Screw down mounting flange(Included)
Height	42mm
Width	82mm
Accessory	
Special features	120° beam angle, 5700K colour temperature

DIMENSIONS (Millimetres)


ML353E-07

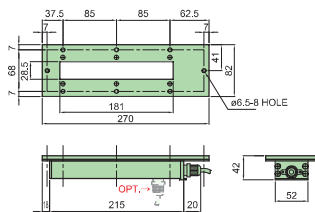




ML353E-14

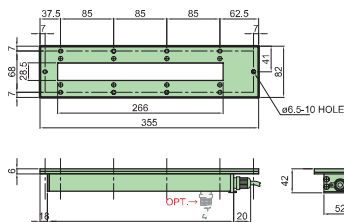

ML353E-28

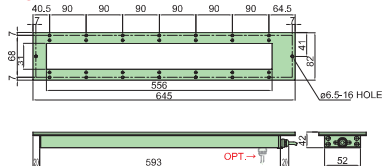

MOUNTING DIMENSIONS (Millimetres)

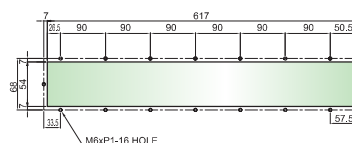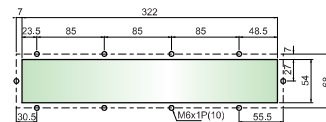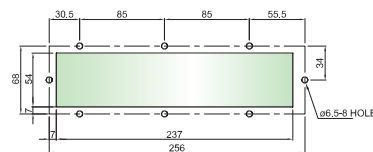

Data may vary due to component tolerances.
E & OE