


Part No. ML6521, ML6522, ML6523, ML6524

Redbank 200mm LED Signal Light, 12-24VDC Data Sheet



Fitted with	90 LEDs/aspect
Lens diameter	200mm
Input voltage	12-24VDC
Power consumption	8 watt/aspect
Current/aspect	560mA @ 12VDC 270mA @ 24VDC
Light output	>4000mcd/m ²
Dominant wavelength	
Red	635nm
Yellow	590nm
Green	505nm
Blue	465nm
White	6500K
Average life of LEDs	60,000 hours
Housing	polycarbonate, UV stabilised
Mounting	L-bracket supplied
Colours available	red, green, amber, blue, white
Options	arrows & wording available
System of protection	IP55
Visors	can be mounted horizontal or vertical

DIMENSIONS (Millimetres)

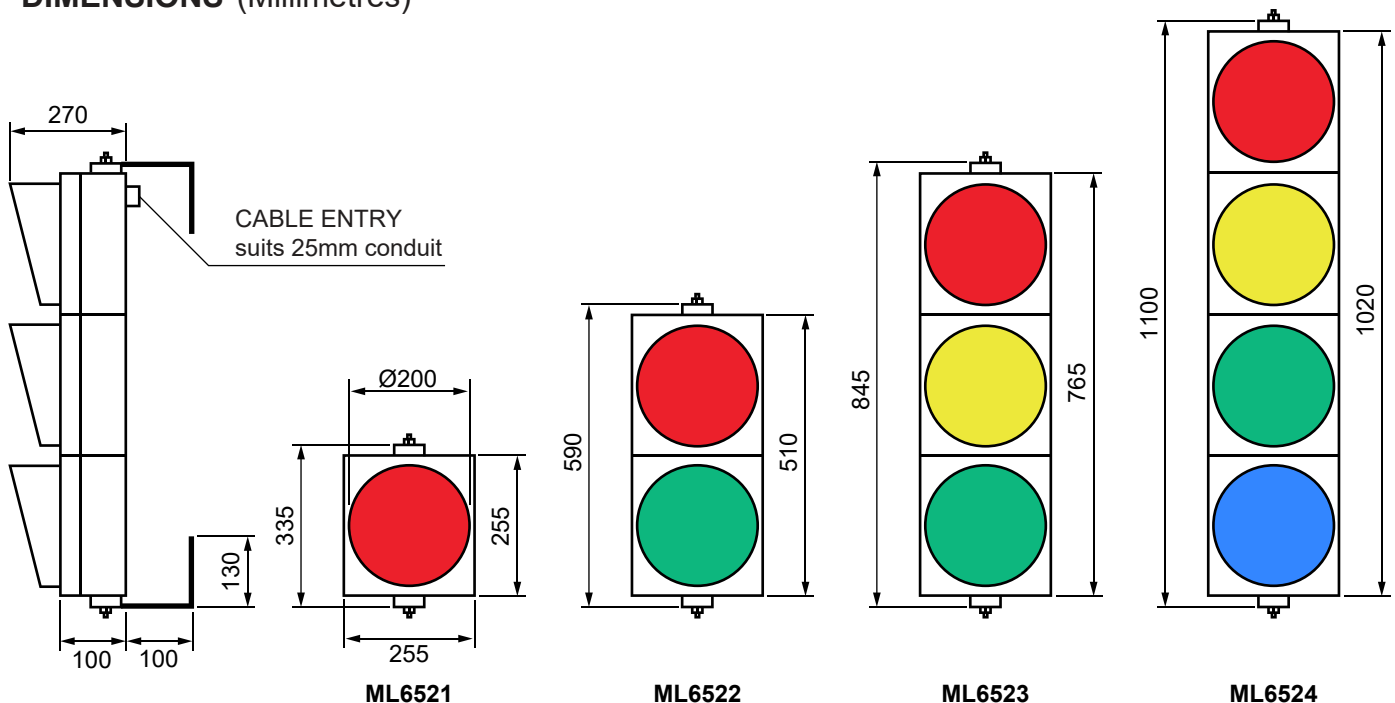

Colours shown for illustration purposes only. Any combination available.

Data may vary due to component tolerances.
E & OE

PH:1300 788 239
www.redbank.net.au
©07.2017 Redbank Group

RedbankGroup